

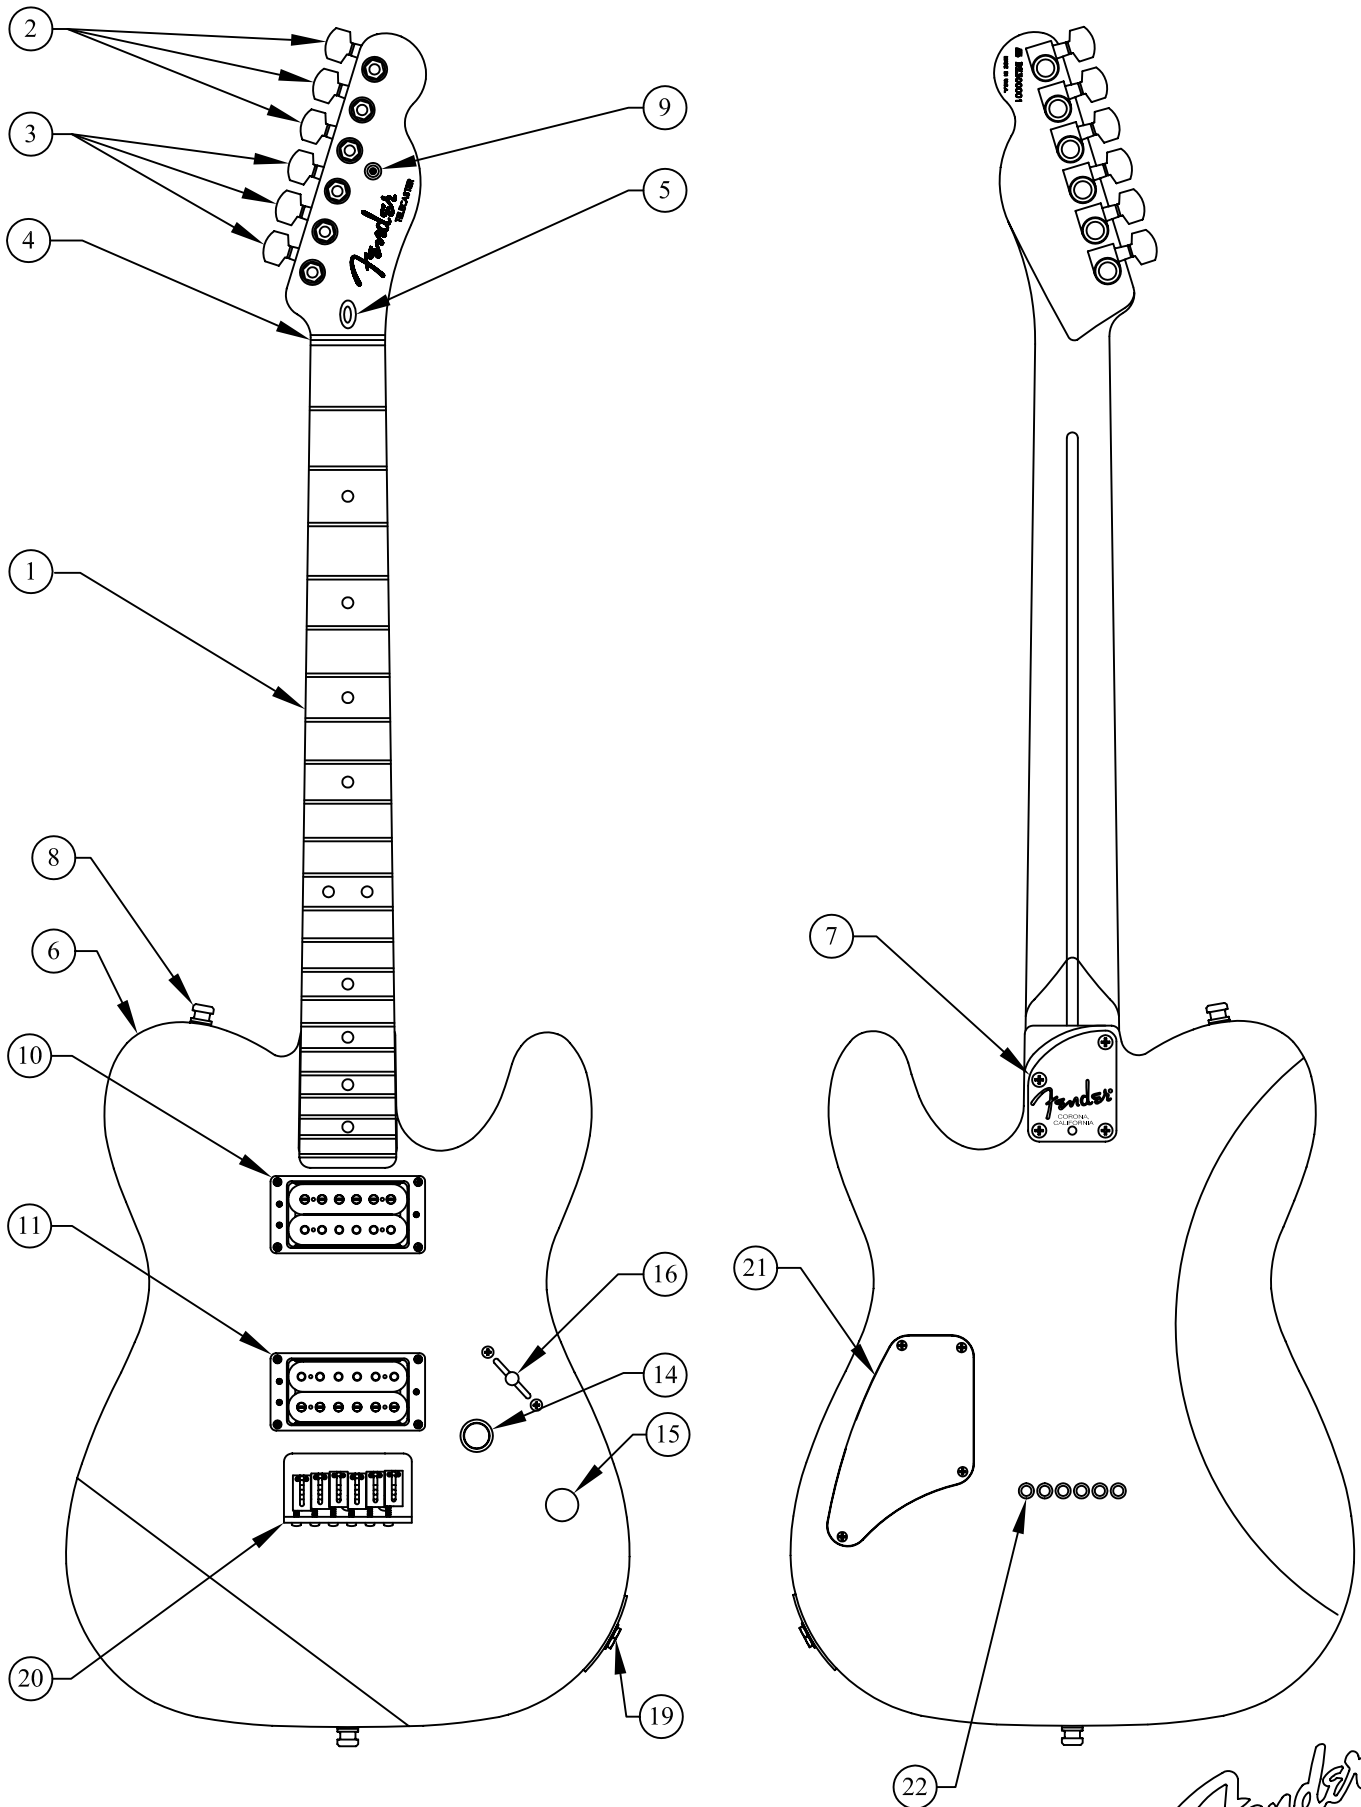


AMERICAN DELUXE TELECASTER®, FMT/QMT, 0101670/1680

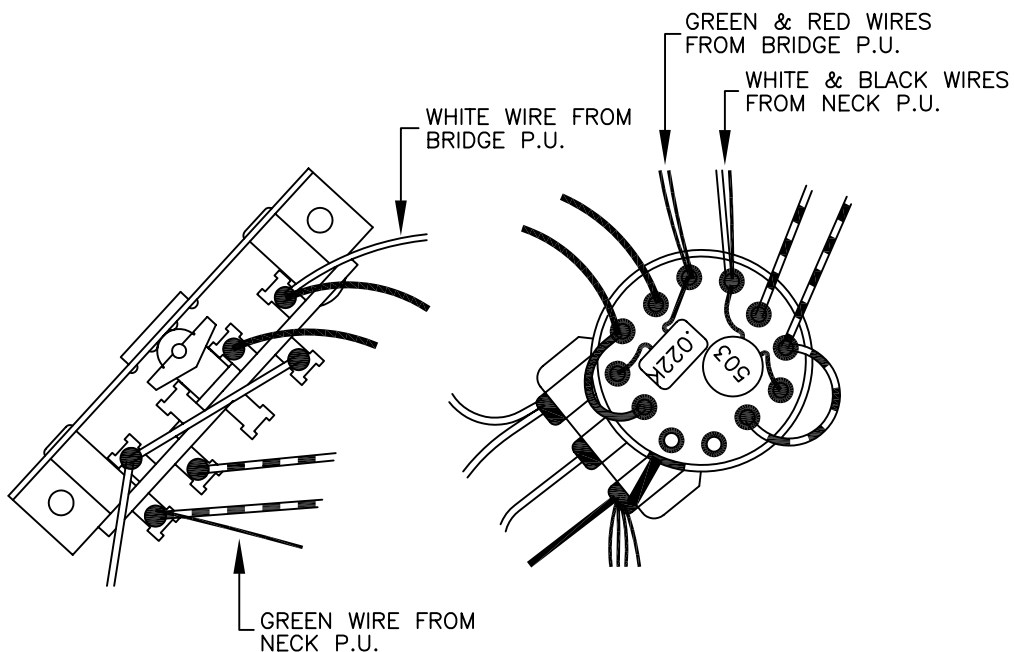

Fender[®]

WIRING DIAGRAM

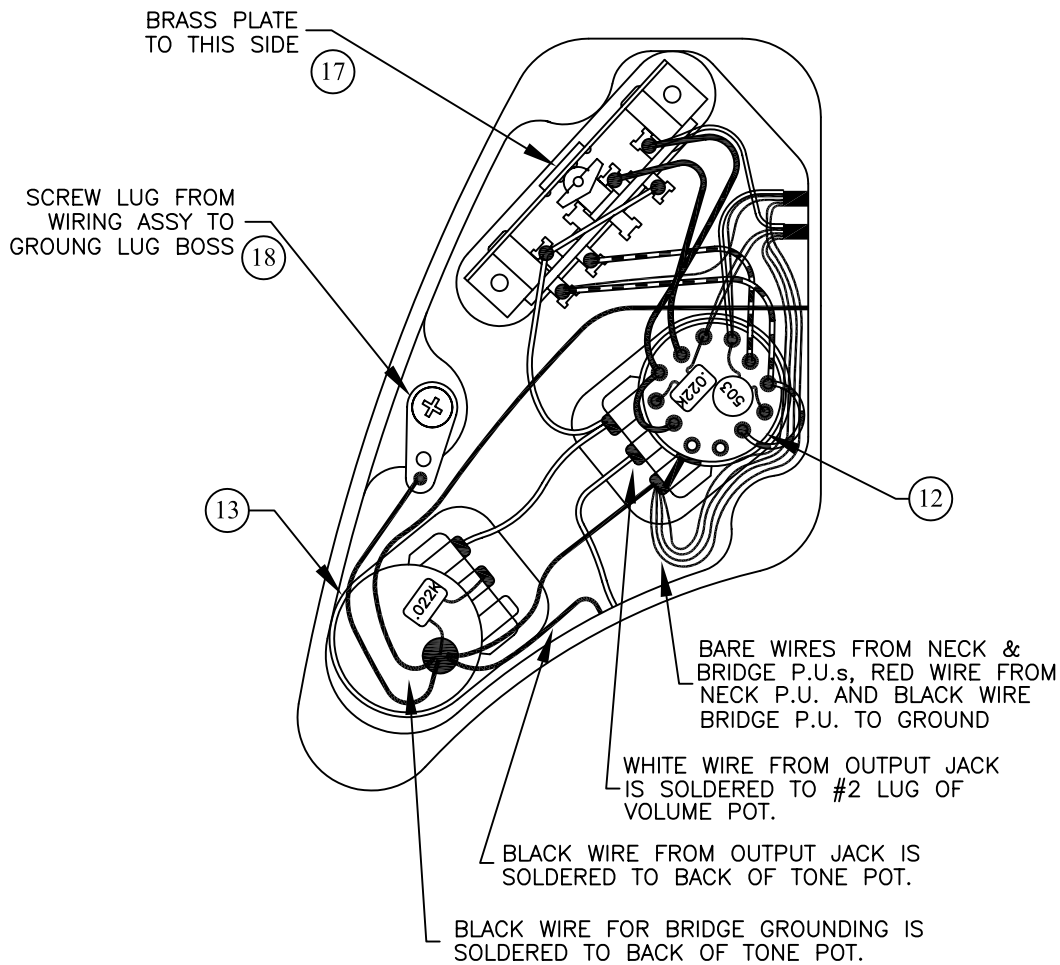

AMERICAN DELUXE TELECASTER®, FMT/QMT, 0101670/1680


REF.#	P/N	DESCRIPTION	REF.#	P/N	DESCRIPTION
1	0064231000	Neck, American Dlx Telecaster®, Ebony	20	0058420000	Bridge Assembly
2	0036447000	Tuning Key, Lock (1, 2, 3) Ultra Pol Chr		0021373000	Mounting Screw
	0058815000	Washer		0032911000	Bridge Plate
	0058820000	Bushing		0058084000	Bridge Section, (6)
3	0036448000	Tuning Key, Lock (4, 5, 6) Ultra Pol Chr		0017031000	Intonation Screw, (6)
	0058815000	Washer		0019395000	Intonation Spring, (5&6)
	0058820000	Bushing		0019394000	Intonation Spring, (1-4)
4	0083675000	Bone Nut		0026779000	Height Adjustment Screw, (1&6)
5	0023811000	Truss Rod Adjusting Wrench		0026780000	Height Adjustment Screw, (2-4)
6	See Chart	Body Am Dlx Telecaster® FMT/QMT		0018531000	Wrench
7	0059209000	Neck Mounting Plate	21	0061207000	Back Plate
	0021424000	Mounting Screw		0021407000	Mounting Screw
	0031571000	Tilt Adjustment Screw	22	0021429000	String Retainer
	0023811000	Tilt Adjusting Wrench			
8	0021453000	Strap Button			
	0021422000	Mounting Screw			
	0019056000	Felt Washer, Black			
	0020491000	Felt Washer, White			
9	0054625000	String Guide			
	0021407000	Mounting Screw			
10	0068165000	Pickup, Mid Neck			
	0053002000	Mounting Ring			
	0058404000	Ring Mounting Screw			
	0050167000	Ring Mounting Spring			
	0053161000	Mounting Screw			
11	0068164000	Pickup, Bridge			
	0053002000	Mounting Ring			
	0058404000	Ring Mounting Screw			
	0050167000	Ring Mounting Spring			
	0053161000	Mounting Screw			
12	0061630000	S-1 Sw/Pot Assy 500K, Volume			
	0024832000	Capacitor, .022uF			
	0015552000	Capacitor, .05uF			
	0016352000	Mounting Nut			
	0016436000	Lock Washer			
	0031153000	Flat Washer			
13	0037407000	Control 500K			
	0024832000	Capacitor, .022uF			
	0016352000	Mounting Nut			
	0016436000	Lock Washer			
	0031153000	Flat Washer			
14	0063225000	Knob, Volume			
	0063254000	Switch Cap, Volume			
15	0063256000	Knob, Tone			
16	0013267000	Knob, Selector Switch			
17	0053290000	Switch, 3-Way			
	0021417000	Mounting Screw			
18	0012869000	Solder Lug			
	0015116000	Mounting Screw			
19	0021956000	Output Jack			
	0016436000	Lock Washer			
	0031153000	Flat Washer			
	0016352000	Mounting Hex Nut			
	0050100000	Ferrule, Jack Recess			

BODY COMBINATION CHART

Type	P/N	Color
FMT	0064232520	Amber
	0064232552	Tobacco Sunburst
	0064232561	Black Cherry burst
	0064232562	Blue Transparent
QMT	0064233520	Amber
	0064233552	Tobacco Sunburst
	0064233561	Black Cherry burst
	0064233562	Blue Transparent


AMERICAN DELUXE TELECASTER®, FMT/QMT, 0101670/1680







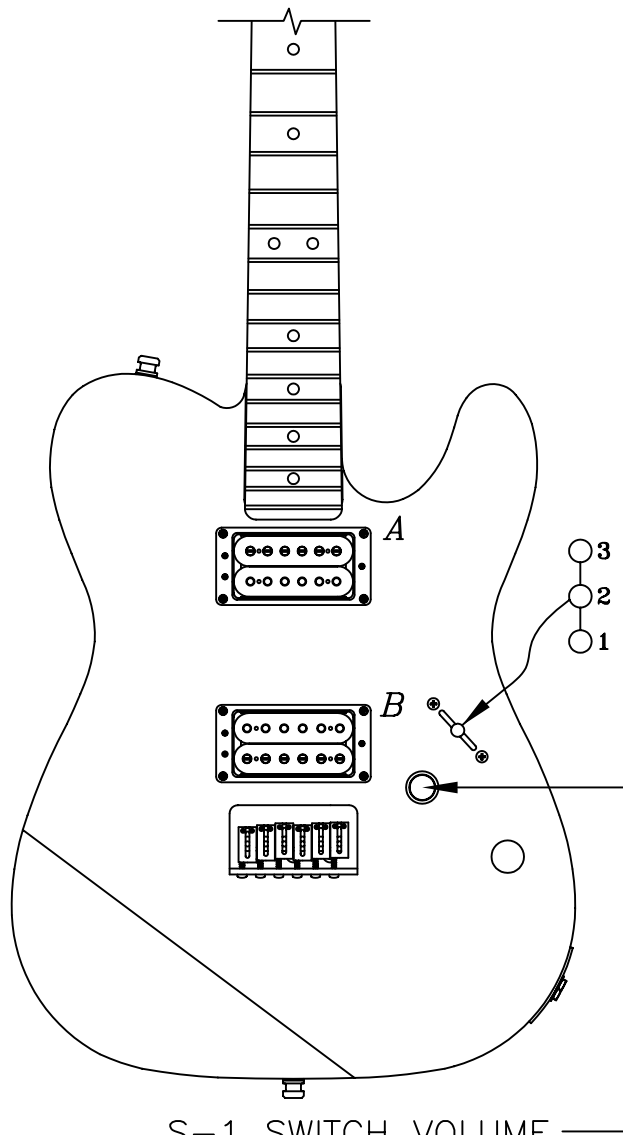


SWITCH & CONTROL FUNCTION














S-1 SWITCH VOLUME POT (UP & DOWN)

MV = MASTER VOLUME
 MT = MASTER TONE
 "x" = SERIES CONNECTION
 "+" = PARALLEL CONNECTION
 "() " = INDICATES PAIRED CONNECTION
 CAP = CAPACITOR

 INDICATES POSITION OF 3 WAY SWITCH

3 WAY SW, STEALTH SW UP			
			POSITION
MV+MT 1x2	MV+MT 1x2+3x4	MV+MT 3x4	CONTROL
			← NECK PICKUP (A) COILS 1 & 2
			← BRIDGE PICKUP (B) COILS 3 & 4

3 WAY SW, STEALTH SW DOWN			
			POSITION
MV+MT (2+CAP)x1	MV+MT 1+4	MV+MT (3+CAP)x4	CONTROL
			← NECK PICKUP (A) COILS 1 & 2
			← BRIDGE PICKUP (B) COILS 3 & 4

	PICKUP IS ON
	PICKUP IS OFF
<i>A</i>	PICKUP (NECK)
<i>B</i>	PICKUP (BRIDGE)