

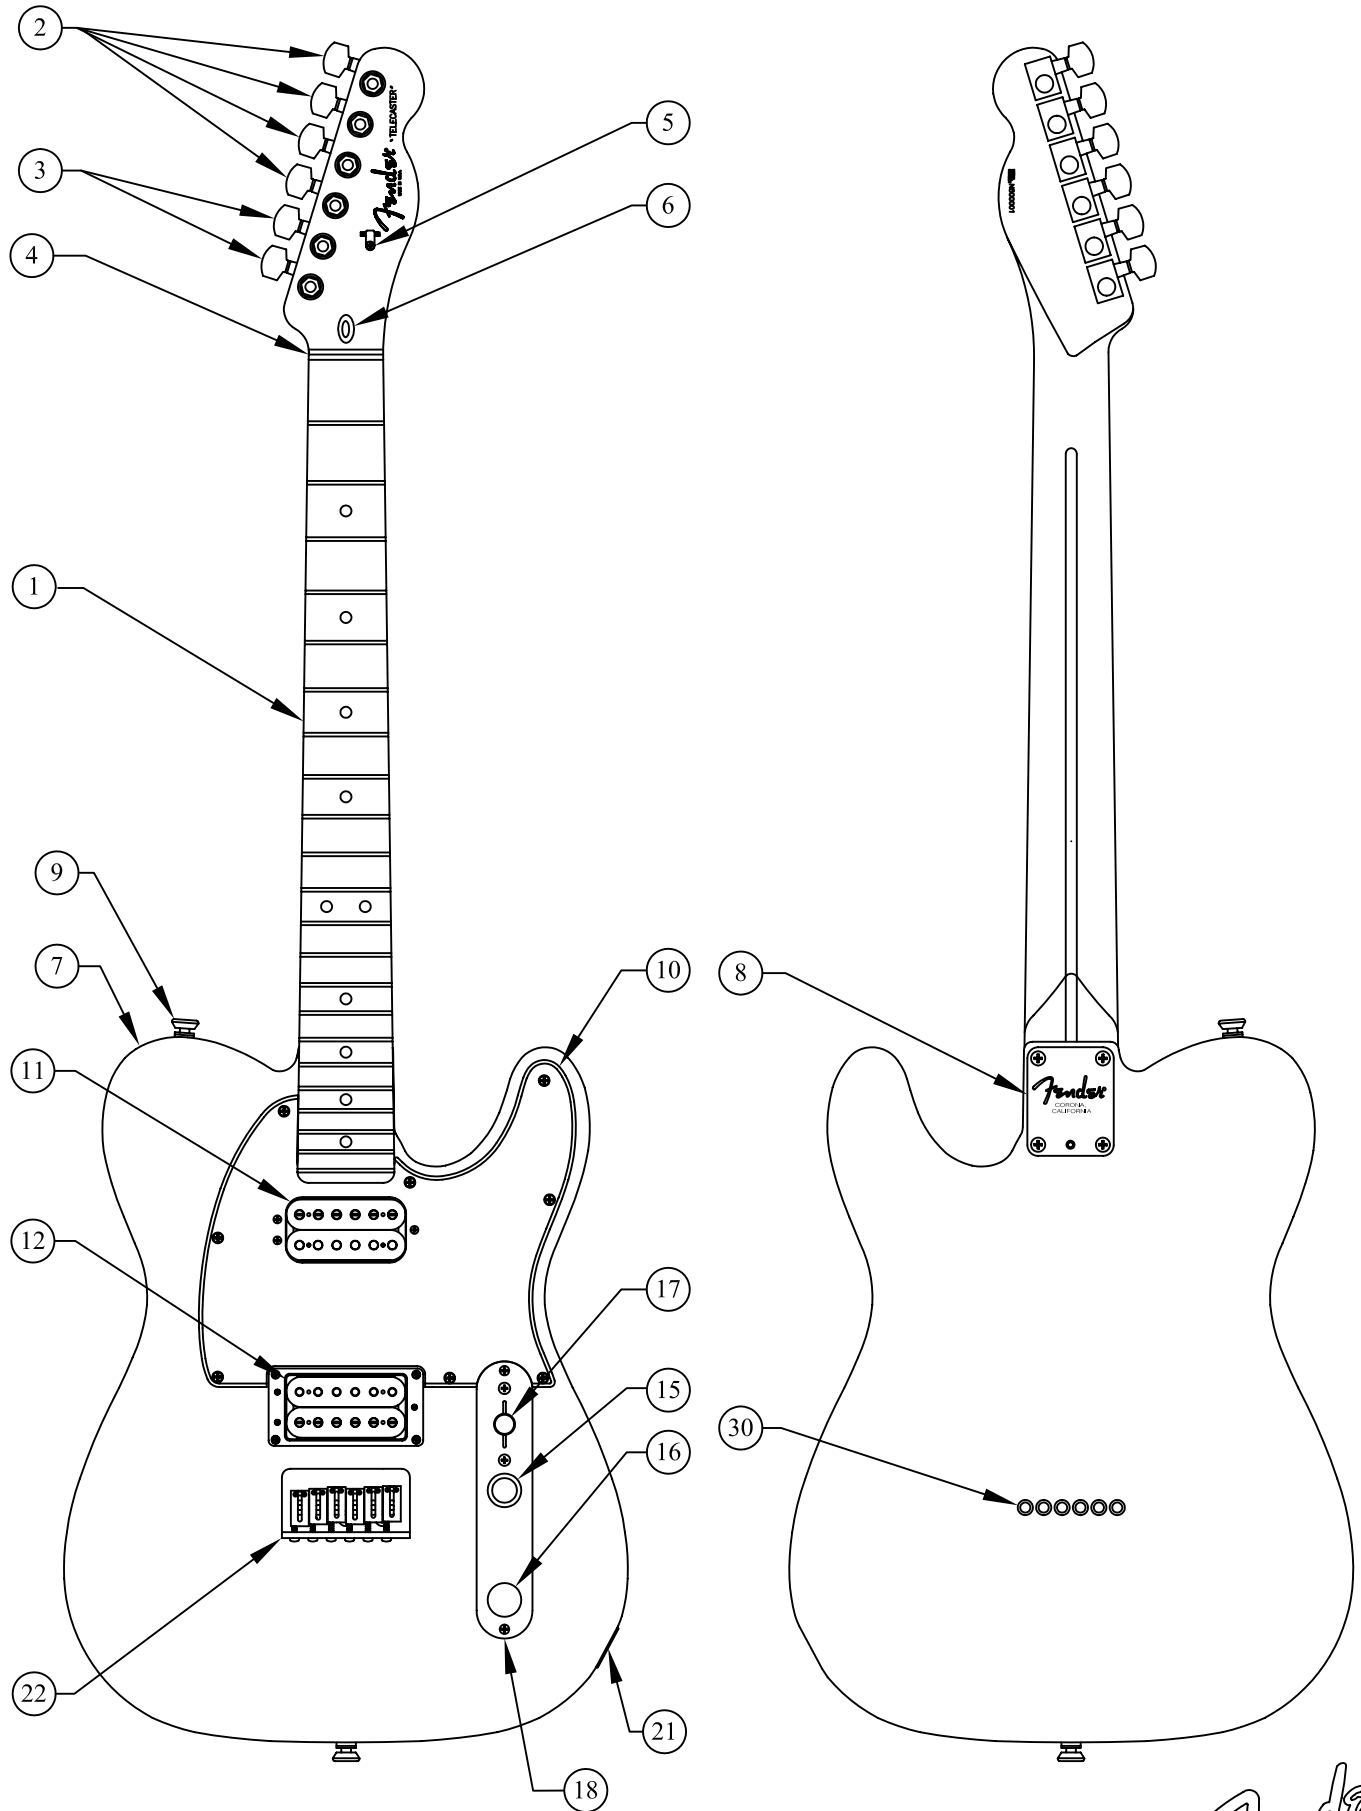



AMERICAN TELECASTER® HH, 0118760, RW

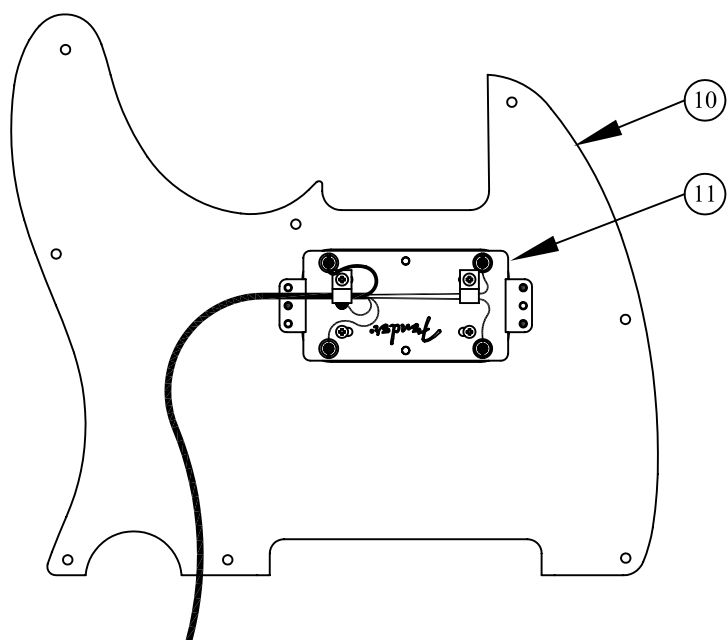

WIRING DIAGRAM

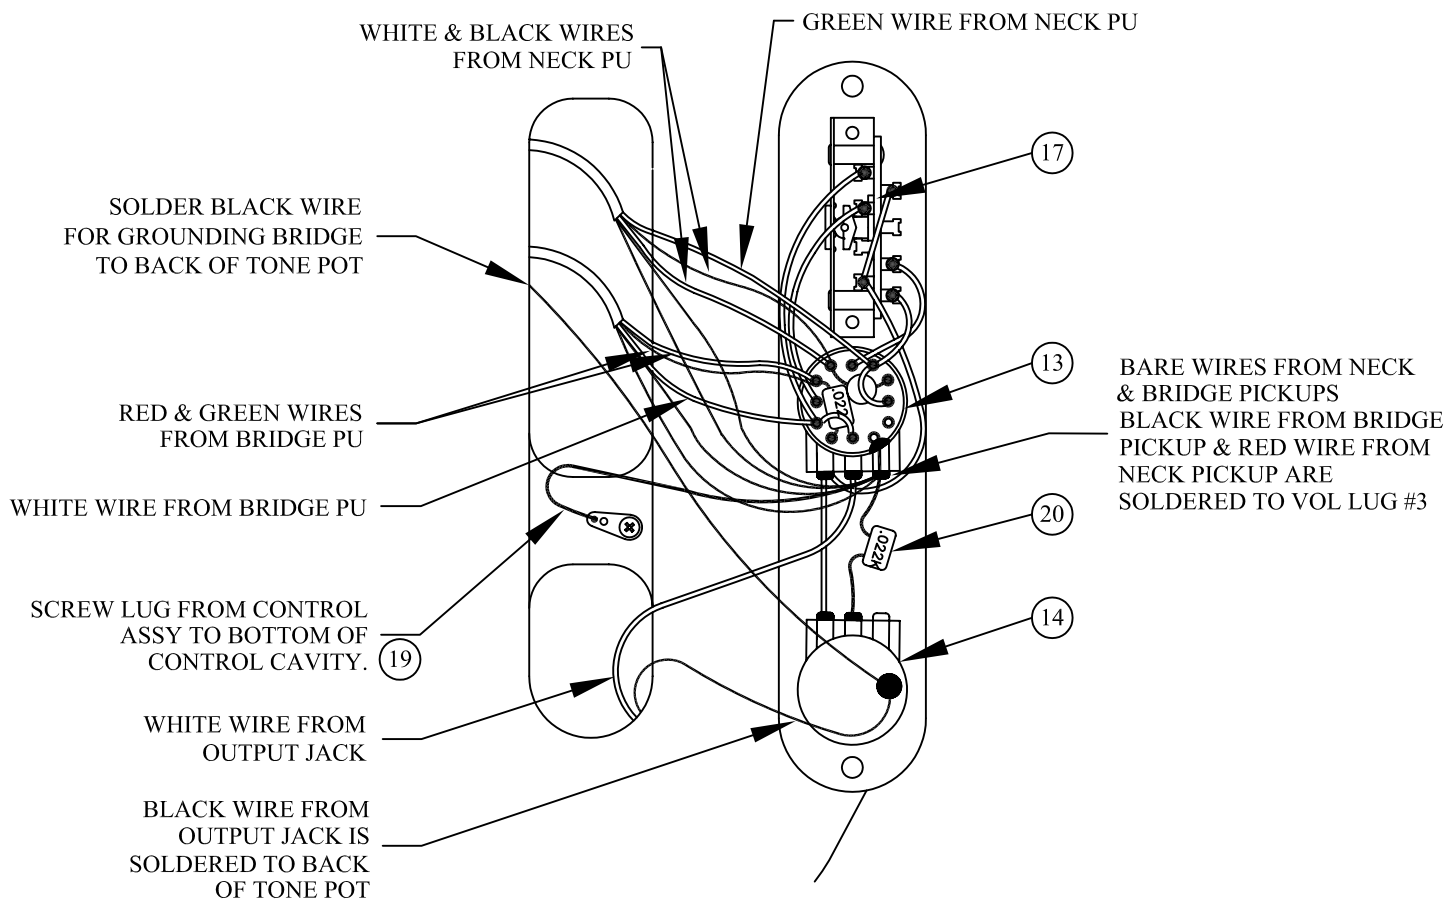

PICKGUARD ASSEMBLY

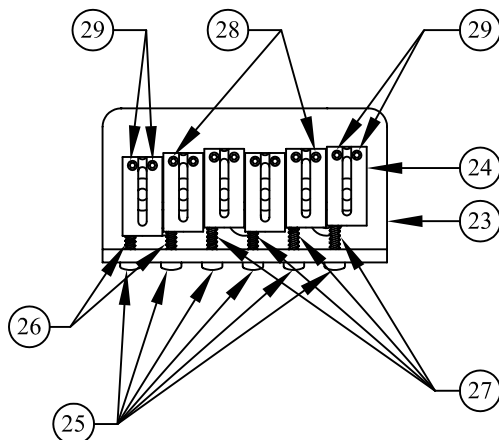

BRIDGE ASSEMBLY

# AMERICAN TELECASTER® HH, 0118760, RW


REF.#	P/N	DESCRIPTION	REF.#	P/N	DESCRIPTION
1	0056219000	Neck, American Series Telecaster®, RW	22	0032909000	Bridge Assembly
2	0056260000	Tuning Key, E,B,G,D		0021373000	Mounting Screw
	0058815000	Washer	23	0032911000	Bridge Plate
	0058820000	Bushing	24	0026099000	Bridge Section, (6)
3	0021374000	Tuning Key, (1) Set	25	0017031000	Intonation Screw, (6)
	0058815000	Washer	26	0019394000	Intonation Spring, (1-4)
	0058820000	Bushing	27	0019395000	Intonation Spring, (5-6)
4	0083675000	Bone Nut	28	0026780000	Height Adjustment Screw, (8)
5	0021537000	String Retainer		0018531000	Adjusting Wrench, Saddle Height
	0021405000	Mounting Screw	29	0026779000	Height Adjustment Screw, (4)
6	0023811000	Adjustment Wrench		0018531000	Adjusting Wrench, Saddle Height
7	See Chart	Body, American Series Telecaster®.HH	30	0021429000	String Retainer, Ferrule
8	0054038000	Neck Mounting Plate			
	0021424000	Mounting Screw			
	0031571000	Tilt Adjustment Screw			
	0023811000	Tilt Adjusting Wrench			
9	0063267000	Strap Button			
	0016188000	Mounting Screw			
	0020491000	Felt Washer, White			
	0019056000	Felt Washer, Black			
10	0068218000	Pickguard, Am Telecaster®, HH/HS, B/B/B			
	0021407000	Mounting Screw			
11	0065291000	Pickup, Neck			
	0050166000	Mounting Screw			
	0050167000	Spring			
12	0065287000	Pickup, Bridge			
	0053002000	Ring. HBUP Neck, Short, Black			
	0058404000	Mounting Screw			
	0050167000	Spring			
13	0061261000	Switch Pot Assembly 500K, Volume			
	0024832000	Capacitor, .022uf			
	0016352000	Mounting Hex Nut			
	0016436000	Lock Washer, Intl			
14	0037407000	Control, 500K, Tone			
	0016352000	Mounting Screw			
	0016436000	Lock Washer, Intl			
15	0059272000	Knob, Volume, Chrome			
	0059270000	Switch Cap, Chrome			
	0059278000	Coupling Sleeve Sosh			
	0028897001	Screw Set			
16	0013359000	Knob, Tone, Alumium Knurl			
	0028897001	Screw Set			
17	0053290000	Switch, Lever 3-Position			
	0021417000	Mounting Screw			
	0018359000	Knob, Black			
18	0033134060	Control Plate			
	0021407000	Mounting Screw			
19	0012869000	Lug			
	0015116000	Mounting Screw			
20	0024832000	Capacitor, .022uf			
21	0021956000	Output Jack			
	0021452000	Ferrule, Jack			
	0016352000	Mounting Hex Nut			
	0010355000	Retainer, Jack			
	0016436000	Lock Washer, Intl			

## BODY COMBINATION CHART


P/N	Color
0063217506	Black
0063217525	Chrome Red
0063217543	Pewter
0063217595	Chrome Blue








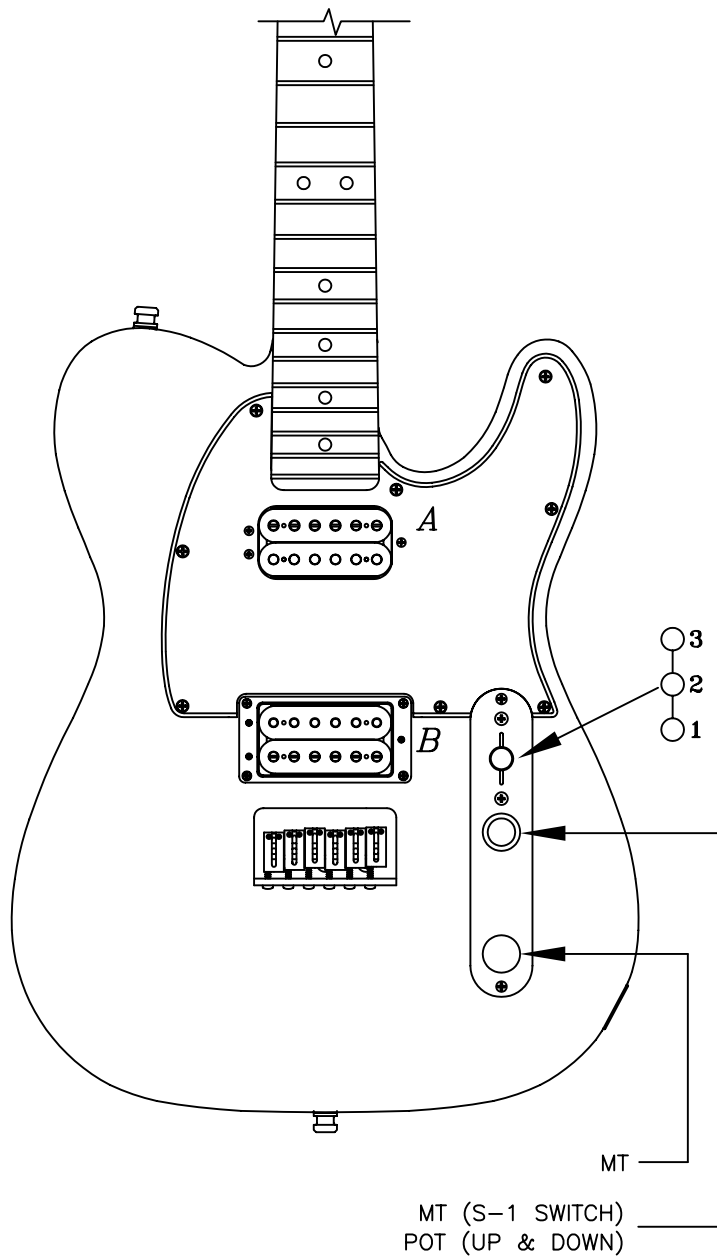












SWITCH & CONTROL FUNCTIONS





MV = MASTER VOLUME  
 MT = MASTER TONE  
 "x" = SERIES CONNECTION  
 "+" = PARALLEL CONNECTION  
 "( ) " = INDICATES PAIRED CONNECTION

 INDICATES POSITION OF 3 WAY SWITCH

3 WAY SW, S-1 SWITCH UP			
			POSITION
MV+MT 1x2	MV+MT 1x2+3x4	MV+MT 3x4	CONTROL
			← NECK PICKUP (A) COILS 1 & 2
			← BRIDGE PICKUP (B) COILS 3 & 4

3 WAY SW, S-1 SWITCH DOWN			
			POSITION
MV+MT (2+CAP)x1	MV+MT 1+4	MV+MT (3+CAP)x4	CONTROL
			← NECK PICKUP (A) COILS 1 & 2
			← BRIDGE PICKUP (B) COILS 3 & 4

	PICKUP IS ON
	PICKUP IS OFF
<i>A</i>	PICKUP (NECK)
<i>B</i>	PICKUP (BRIDGE)